


Sinexcel

Everything about profitability
and charging experience

SEC 80kW Series DC Fast Charger

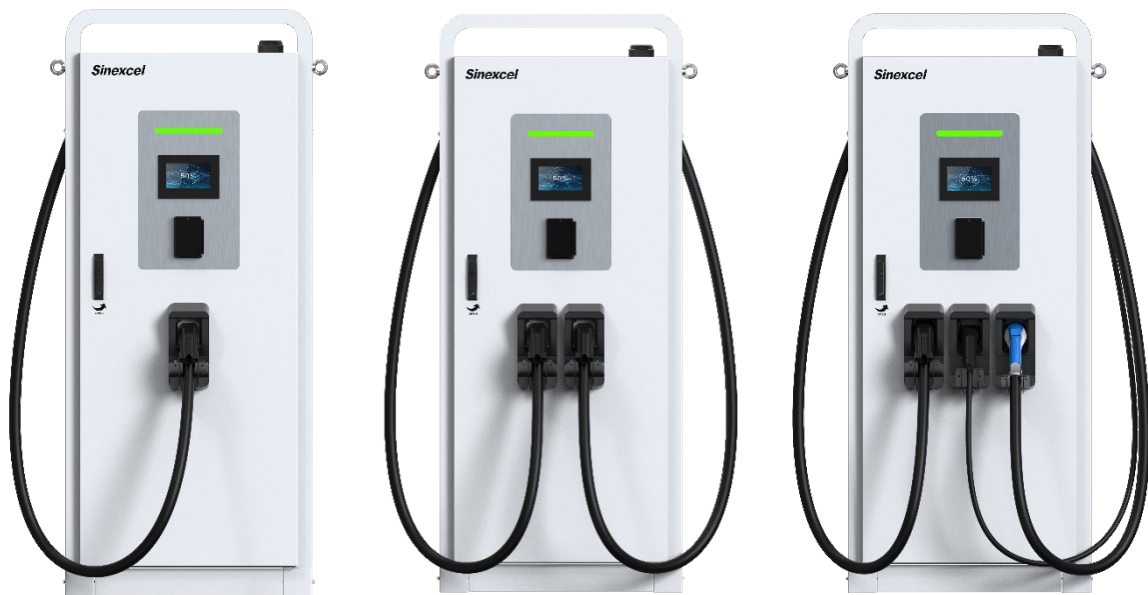


Overview

The SEC 80kW is an integrated DC fast charger that features high efficiency and flexible configured. It supports the CCS & JAP & Type 2 triple connector charging at the same time and adopts compact design, with a smaller area covered.

The Charger used in centralized fast charging station, it adopts 20kW charging power module of Sinexcel, and meet the charging demand of larger capacity and high endurance electric on the market.

Dimensions

W850*D450*H2030mm

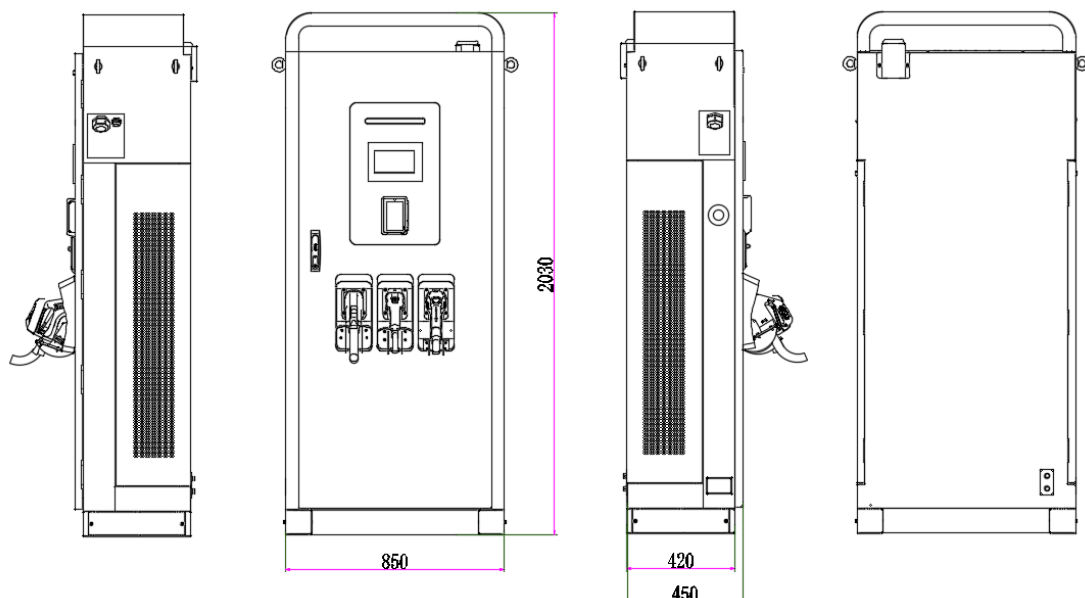

Specifications

80kW Integrated Charger		
Input Characteristic	Input voltage	AC 400 V +/- 10%
	Input frequency	50 Hz/ 60 Hz
	Input type	3P + N + PE
	Input current	150 A
	Input power	89 kW
	Power factor	0.99
	THDi	<5%
	Grounding type	TN-S, TN-CS.
Output Characteristic	Connector options	CCS2 CCS2+CCS2 CCS2+CHAdeMO CCS2+CHAdeMO+Type2 CCS2+CCS2+Type2
	Output voltage	CCS2: 200-1000 Vdc CHAdeMO: 200-500 Vdc Type 2: AC 400 V +/- 10% 300~1000V is the output voltage of constant power output.
	Maximum output current	CCS2: 200A CHAdeMO: 125A Type 2: 32A
	Rated power	DC: 80kW AC: 22kW
	Peak efficiency	96%
Environment	Operational altitude	<2000 m
	Operating temperature	-25 °C to +65 °C
	Temperature derating	Up to 50 °C, 100% output power; 50-65 °C interval, linear power limit; 65 °C or more, module shutdown protection.
	Storage temperature range	-30 °C to +70 °C
	Humidity	5 %-95 % Rh non-condensing
Structure	IP and IK rating	IP55/ IK10
	Dimensions	W850*D450*H2030mm
	Weight	≤300 kg
	Enclosure material	304 stainless steel / sheet metal
Components	Cable length	5 m (total, outside charger 4.5m)
	Screen	7" HD high-contrast touchscreen
	RFID Reader	ISO 14443 A + B to part 4 and ISO/IEC 15693, Mifare1, NFC.
	Emergency button	Yes
	Communication interface	4G / LAN Port

Others	Language	English (Support customizing other languages)
	Communication protocol	OCP1.6J
	Cooling method	Air cooled
	Payment method	RFID / APP (Mobile phone / Visa / Master is optional)
	EMC	Class A (industrial)
	Protection	Undervoltage protection, Overvoltage protection, DC Overcurrent protection, Over-temperature protection, Surge protection, Emergency stop protection, etc.
	Optional functions	Tilt detection, Flood detection, Smoke detection, Heater.
Standards and Certifications	Standards	IEC 61851, IEC 62196, DIN 70121, ISO 15118, etc.
	Certifications	CE, TUV, TR25, UKCA, RCM.

Shenzhen Sinexcel Electric Co.,Ltd.

<https://en.sinexcel.com/>

Address: 6th Building, 2nd District, Baiwangxin High-tech Industry Park, Songbai Road, Nanshan District, Shenzhen.

© Sinexcel 2022. All rights reserved.

Sinexcel

Everything about profitability
and charging experience